


## DETAIL: Metal Roof – Standing Seam

### GENERAL DETAILS – FIBERGLASS SKYLIGHT PANEL– ROOF COATING RESTORATION

This detail drawing is intended to show the generally recommended procedure for dealing with the condition shown. Actual field conditions may vary. When such conditions vary slightly from the drawing, the intent and industry best practices are to be used. Any question, contact Aldo Products Company, Inc., Technical Department.

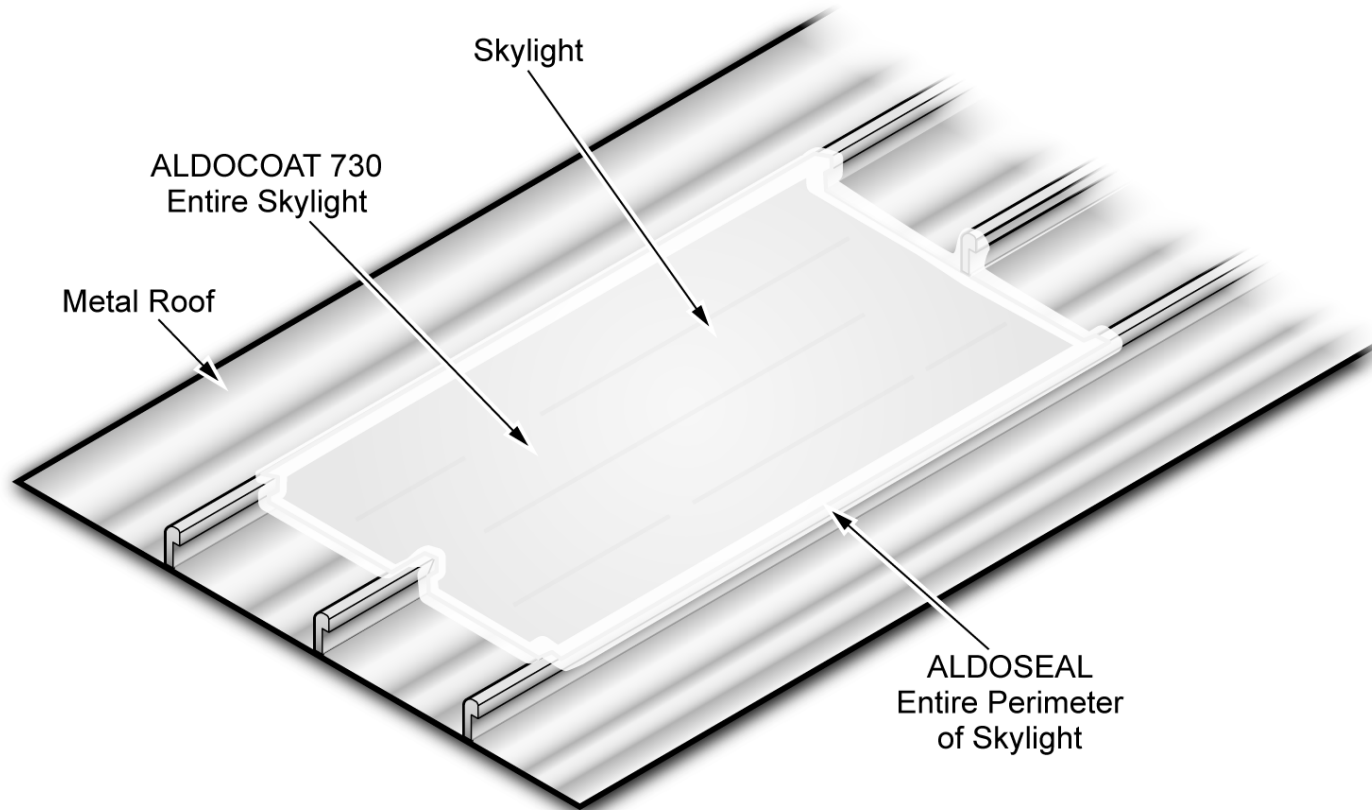

1. Apply ALDOCOAT 730 Skylight to entire skylight surface area at a minimum of 16 wet mils.
2. Apply ALDOSEAL sealant to skylight perimeter, at a minimum of 50 wet mils.
3. Feather sealant to maintain positive drainage around skylight perimeter.