


The ALDOCOAT Metal Roof Restoration System

The ALDOCOAT Metal Roof Restoration System is a fluid applied roof system that is the ideal solution for any aging metal roof. This water based, premium acrylic coating system has been manufactured by Aldo Products for over 35 years and carries a variety of product approvals and ratings, including Energy Star, Miami-Dade County, Florida Building Code approval and The Cool Roof Rating Council.

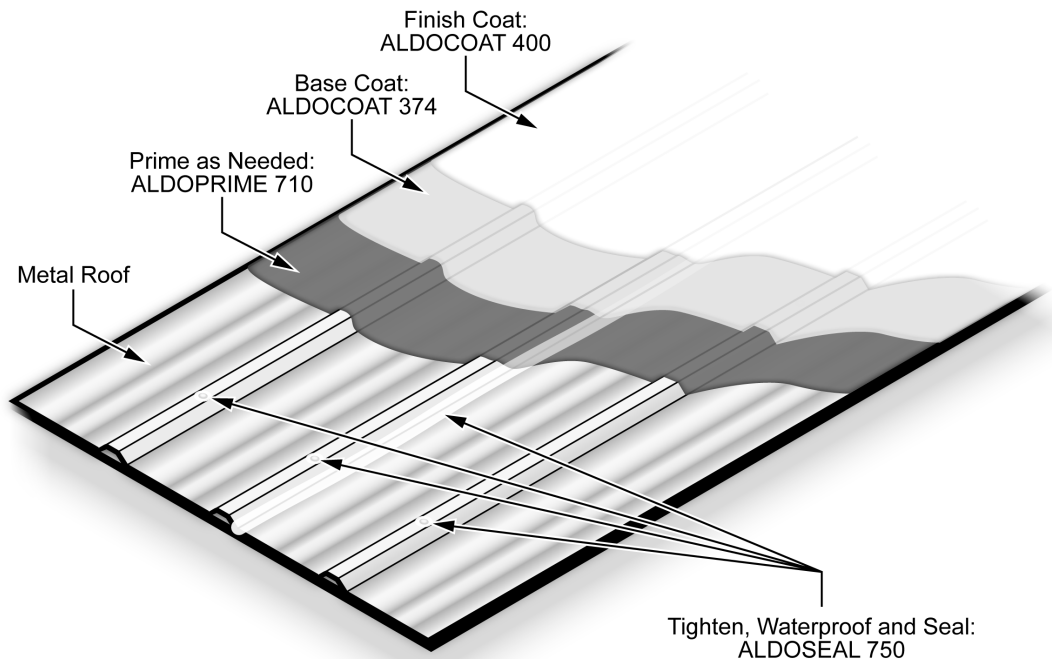

System Application

- Substrate preparation, pressure washing
- Replacing of all backed out or missing fasteners, tightening of all seams
- Priming of all oxidized and rusted areas with ALDOPRIME 710
- Attention to details; waterproofing and sealing of seams, sealing of fasteners with ALDOSEAL 750
- Base coat application of ALDOCOAT 374 Contractor Grade Acrylic
- Finish coat application of ALDOCOAT 400 Premium Acrylic

System Value

- Waterproof, seamless elastomeric reflective membrane
- Reduction of facility energy costs
- Extended service life of the original roof system
- No amortization; Total cost is 100% expensed in year of installation
- No business interruption during installation

Pre-installation Inspection

- It is recommended that an Aldo Products authorized representative visit the project with the Approved Applicator (an independent roofing contractor) to evaluate the roof substrate for eligibility of the ALDOCOAT System.
- If required, results of adhesion test must be submitted to Aldo Products Company, Inc., to confirm product compatibility with metal substrate.
- Any metal panels showing severe oxidation and degradation must be replaced.

Roof and Substrate Preparation

- Pressure wash the entire roof surface with a minimum of 3000 psi.
 - Use TSP or other environmentally friendly cleaner.
 - Rinse thoroughly and allow to completely dry before proceeding.
 - Use caution not to introduce more water into the building during this step.
- The following should be assessed for necessary repairs prior to the coating application:
 - Roof pipe penetrations
 - HVAC stands and cricket areas
 - Parapet walls, flashings and copings
 - Interior gutters and drains
 - Rooftop sign or equipment anchors
 - Skylights, perimeters and fiberglass surface

Packaging Options

All ALDOCOAT and ALDOPRIME liquid applied products are available in fifty-five gallon drums and five gallon pails; sealants are available in five gallon, two gallon and one gallon pails. ALDOSEAL 399 Silicone Sealant is also available in 20 oz. sausage tubes.



Note: This SpecSheet is designed as a system reference only. Please refer to the Technical Data and Design Guidelines on the Resource page at www.aldoproducts.com for more complete application information. Guidelines for each specific warranted project can also be produced by our Technical Department. All published information is subject to change without notice.

