


## DETAIL: Metal Roof – Standing Seam

### GENERAL DETAILS – RAISED SKYLIGHT VERTICAL SEAM – ROOF COATING RESTORATION

This detail drawing is intended to show the generally recommended procedure for dealing with the condition shown. Actual field conditions may vary. When such conditions vary slightly from the drawing, the intent and industry best practices are to be used. Any question, contact Aldo Products Company, Inc., Technical Department.

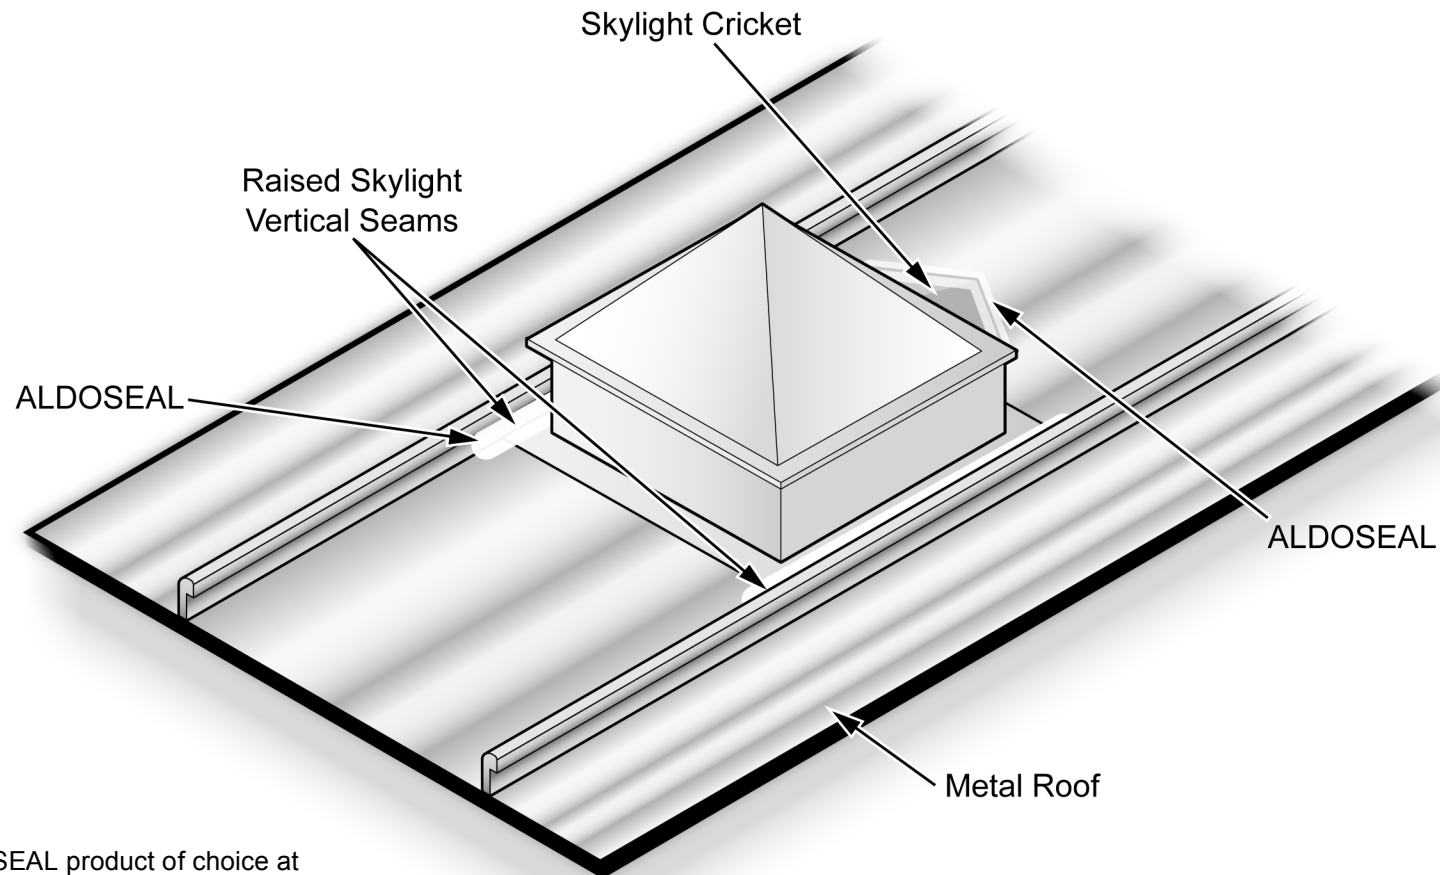

1. Apply the ALDOSEAL product of choice at 4" centered and parallel to the vertical seam
2. Apply at a rate of approximately 50 wet mils, ensuring all voids are sealed.
3. The ALDOSEAL product is to be applied and feathered to create positive drainage of any water flow.